

**DTMACH**

**20+years**

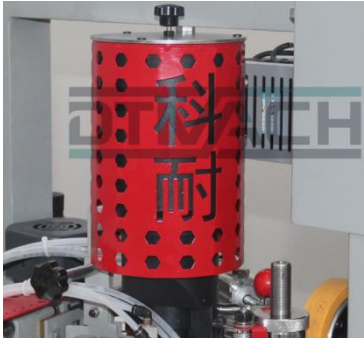
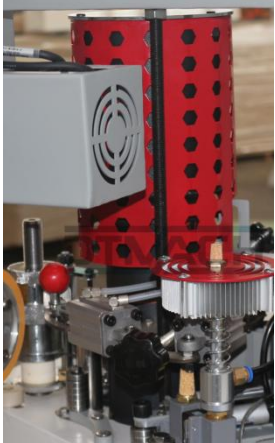
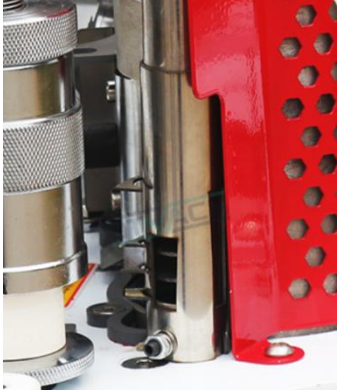


20+ Years experience  
of edge banding  
machine




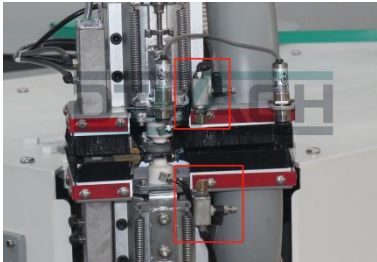


200+ Patents



# DETAILS

PART A: DETAILS			
1	MACHINE		<ul style="list-style-type: none"> <li>➤ <b>VOLTAGE: 415V / 50HZ / 3PHASE</b></li> <li>➤ Total Power: 6.5 KW</li> <li>➤ Air Pressure: 0.6-0.8 Mpa</li> <li>➤ Air Tank: 2 L</li> </ul>
2	STACKING ARM		<ul style="list-style-type: none"> <li>➤ Total Length: 2250 mm</li> <li>➤ Shape: Round</li> <li>➤ Suction Cup: <math>\phi</math> 300 mm &amp; <math>\phi</math> 140 mm</li> <li>➤ Loading Capacity: <math>\leq</math> 100 KG</li> <li>➤ Big Arm: <math>\phi</math> 165 mm</li> <li>➤ Small Arm: <math>\phi</math> 114 mm</li> </ul>
3	STRIP		<ul style="list-style-type: none"> <li>➤ Material: PVC, ABS, Melamine, Veneer(customized)</li> <li>➤ Width: 14-70 mm</li> <li>➤ Thickness: 0.5-3 mm</li> </ul>
4	BOARD SIZE		<ul style="list-style-type: none"> <li>➤ Round: <math>\phi</math> 2.4 m</li> <li>➤ Rectangle: 1.2*2.4 m</li> <li>➤ L shape: 1.4*1.6 m</li> </ul>

<b>E D G E  B A N D I N G  P A R T</b>	<b>GLUE POT</b>		<ul style="list-style-type: none"> <li>➤ Glue: PUR or EVA</li> <li>➤ Volume: 2600 ml</li> <li>➤ Position: TOP</li> <li>➤ Gluing method: Single side</li> <li>➤ Temperature: 110-210°C</li> </ul>
	<b>GLUING</b>		<ul style="list-style-type: none"> <li>➤ Edge banding speeds: 0-30 cm/s</li> <li>➤ Minimum radius of inner arc: R=20 mm</li> <li>➤</li> </ul>
	<b>HEATING</b>		<ul style="list-style-type: none"> <li>➤ Position can be adjusted</li> </ul>
	<b>LASER RANGING  PRECISE DOCKING</b>		<ul style="list-style-type: none"> <li>➤ <b>Function: Laser ranging, precise docking</b></li> <li>➤ <b>Docking Error: ±0.3 mm</b></li> <li>➤ <b>Requirement: Length ≥ 400 mm</b></li> </ul>
	<b>BANDING</b>		<ul style="list-style-type: none"> <li>➤ Width: 14-70 mm</li> <li>➤ Auxiliary Bonding Roller</li> <li>➤ R ≥ 20 mm</li> </ul>

	<b>CLEANING</b>		<ul style="list-style-type: none"> <li>➤ Cleaning Liquid: Water-based</li> </ul>
<b>T R I M M I N G  P A R T</b>			<ul style="list-style-type: none"> <li>➤ Rotatable <math>\pm 15^\circ</math></li> <li>➤ <b>TRIMMING, SCRAPING, CLEANING</b></li> </ul>
	<b>TRIMMING</b>		<ul style="list-style-type: none"> <li>➤ Speed: 0-24 cm/s</li> <li>➤ Trimming method:  <ul style="list-style-type: none"> <li>&lt;14 mm, single trim</li> <li>14-70 mm, double trim</li> </ul> </li> </ul>
	<b>CLEANING</b>		<ul style="list-style-type: none"> <li>➤ Two cleaning devices</li> <li>➤ Water-based cleaning liquid is recommended</li> </ul>
<b>11</b>	<b>WOODEN PACKAGE</b>		

<b>12</b>	<b>WARRANTY</b>	<ul style="list-style-type: none"><li>➤ <b>ONE YEAR warranty</b></li><li>➤ During the warranty period, spare parts are provided free of charge for non-human factors.</li><li>➤ After the warranty period is exceeded, after-sales solutions are provided free of charge.</li></ul>