


**Manual Edge Bander DT-10XZ**



## Section C Product Details

### Product Parameters

| Model                | DT-10XZ            | F-97              |
|----------------------|--------------------|-------------------|
| Voltage              | 220V/ 50Hz/ 1phase | 220v/50hz/1 phase |
| Total Power          | 6.2kw              | 1.2kw             |
| Air Pressure         | 0.5-0.8Mpa         | 0.5-0.8Mpa        |
| Glue Pot             | 2800ml             | 1200ml            |
| Glue Pot Temperature | 110-210°C          | 110-210°C         |
| Speed                | 0-24cm/s           | 0-26 cm/S         |
| Strips width         | 12-70mm            | 8-50 mm           |
| Strips Thickness     | 0.5-3mm            | 0.4-2mm           |
| Size                 | 1010*800*1100mm    | 1000*750*1000mm   |

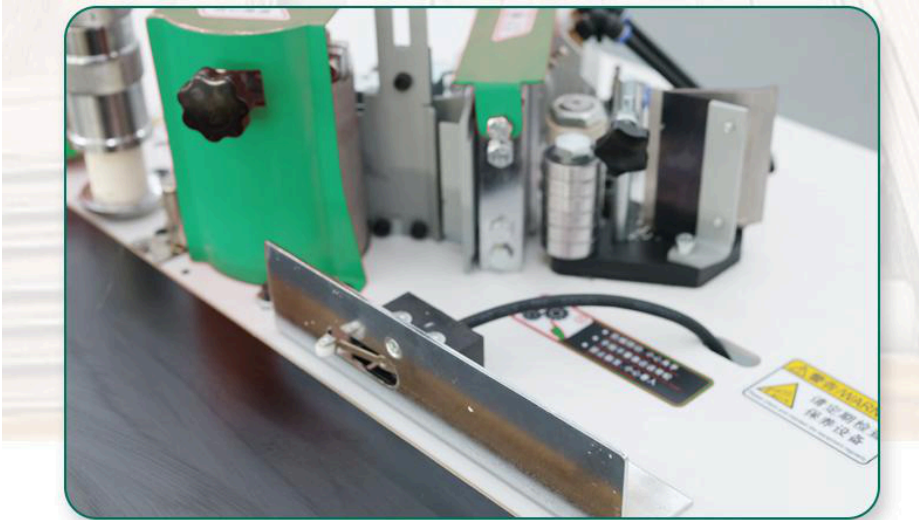

**Limit Switch:** When the board moves to the designated position, it triggers the limit switch to cut the edge banding strip.




**Hot air assisted edge banding for stronger bonding**




**Detachable 45° beveled straight pressure unit**

## Product Features

High productivity, high stability,  
suitable for large-volume customized orders

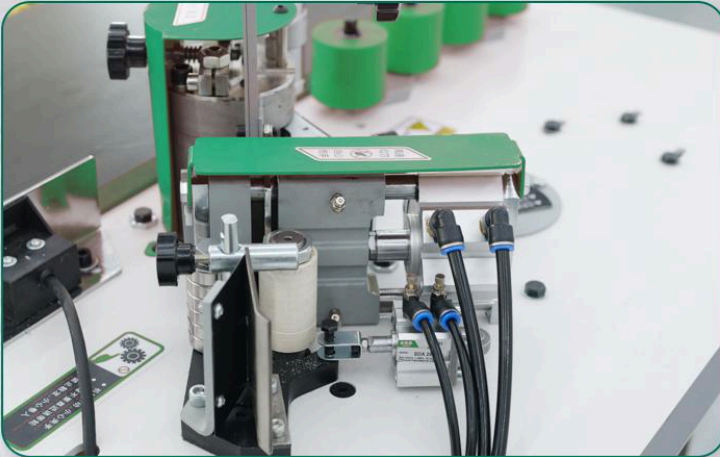

**Brand new cutter assembly**  
Compact structure, good cutting flatness effect

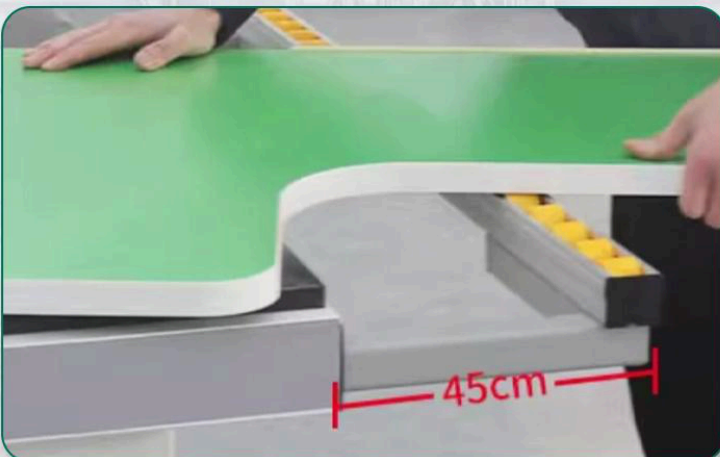

**Widened fluent strip:**  
When sealing large plates, extend 0-45 cm outward



**New type of walking board/preventing edge banding from reversing**  
Suitable for edge banding with a width of 7 centimeters

# Product Display

